



# Fully automatic, intermittent 2-side sealer


## SERVO PACKER 500 T

The Servo Packer 500 T is the intermittent version of the Servo Packer and offers sophisticated, proven technology. User-friendliness is guaranteed by the 7" HM-Interface - Easy Touch KP3 - with its easy and intuitive operation. The clever alternative for creating a film bag in an attractive package design.



### Technical specifications

	<b>BUBBENU7</b>
Cross seal bar, length	22"
Seal bar clearance height	6"
Power supply	400 volt
Film, flat film	approx. 11 - 100 µm
Transport speed	33-115 feet / minute
Packaging capacity, max.	85 cycles / minute

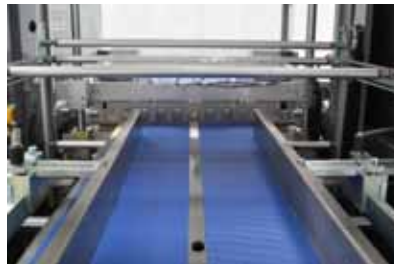

The Servo Packer 500 T with the intermittent operating principle in customary Kallfass quality

### Your benefits highlighted

- Path control: One input of the packing goods parameter in linear dimension for all conveyor belt speeds
- Tight packaging without shrinking
- Attractive package design due to real rectangular film bag
- Very high productivity, flexibility, reliability and availability of the packaging machine
- Fully automatic, intermittent operation
- Maximum flexibility in the packaging process. Use of PE, PO and PLA films

**Solutions based on Kallfass quality.** Competence in production of a wide range of packaging machines, from customer tailored systems to packaging systems for integration into production lines.



KALLFASS is certificated according to ISO 9001:2008

☒ ☒ ☒ N ☒ OO ☒ V ☒ F ☒ P



Complete Packaging Solutions & Systems, Inc.



Results count.