


SERVO PACKER 1000 T





The new one graceful film wrapping

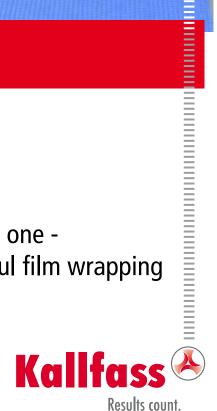

SERVO PACKER 1000 T

The Servo Packer 1000 T is the intermittent version of the Servo Packer and offers sophisticated, proven technology. User-friendliness is guaranteed by the 7" HM-Interface - Easy Touch KP3 - with its easy and intuitive operation. The clever alternative for creating a film bag in an attractive package design.



Technical specifications

reclinical specifications	Servo Packer 1000 T
Cross seal bar, length	45 in.
Seal bar clearance height	6 in.
Power supply	400 volt
Film, flat film	approx. 30 gauge - 3 mil.
Transport speed	15 - 33 feet / minute
Packaging capacity, max.	60 cycles / minute





The Servo Packer 1000 T with the intermittent operating principle in customary Kallfass quality

Your benefits highlighted

- Path control: One input of the packing goods parameter in linear dimension for all conveyor belt speeds
- Tight packaging without shrinking
- Attractive package design due to real rectangular film bag
- Very high productivity, flexibility, reliability and availability of the packaging machine
- Fully automatic, intermittent operation
- Maximum flexibility in the packaging process. Use of PE, PO and PLA films

Solutions based on Kallfass quality. Competence in production of a wide range of packaging machines, from customer taylored systems to packaging systems for integration into production lines.



Email: info@kallfass-us.com