



**Fully-automatic high-performance side sealer
with traveling cross sealing system**

Universa 800 Servo

The Universa 800 SERVO as a "Hybrid" is closing the gap between cycling and continuous motion machines available in the market place today. For the first time, this machine combines advantages from both machine classes into 1 unit, such as full width film transport with vacuum belt for totally square and even bags. Perfect packaging for even the highest requirements is guaranteed. High quality retail packaging for chocolate, software boxes, DVD's, CD's, books, magazines and other high quality retail products.

The continuous motion cross seal and the precise motion control concept with SIEMENS® SIMOTION® as well as Servos for all product related drives allow random packaging with continuous product flow. The soft product movement during the wrapping process minimizes the slip of stacked products and complicated collations. The "800 Servo" uses the same simple product infeed as our highly successful Universa 700. It can easily be integrated in existing production lines. Products with random spacing and different lengths can be wrapped. Format change over, using hand wheels is done quick and easily.

The Universa 800 SERVO: **ultimate performance at an affordable price.**



Complete Packaging Solutions & Systems, Inc.

Kalfass 
Results count.

Technical Data

Universa 800 SERVO

product rate depends on product and film:	80 cycles/min
width of cross seal bar:	32 in.
max. clearance in height of sealing frame:	10 in.
min. product length:	5 in.
film:	PE, Polyolefine and PVC
film cradle:	close to floor for easy film loading
outside diameter of film reel:	max. 16 in.
width of film reel:	max. 35 in. CF
speed of transport conveyor, variable:	up to 130'/min
sealing system:	permanently heated seal bar with sealing ledge temperature regulation and control via PLC
operator interface:	Touchpanel SIEMENS TP 270
programmable logic controller (PLC):	SIMOTION from SIEMENS
power supply	208/480 V/3-phase/w. Ground
rated capacity:	5.0 kVA
nominal current (at 400 V):	7.3 amps

machine controlled with measure values, not time values. This makes product or speed changes fast and simple. No time settings to adjust when changing from one product to another

infeed conveyor can be pulled out for better access during threading of film

permanently heated seal bar with exchangeable sealing ledge, available for different profiles to produce excellent sealing seams depending on product and film

operator guidance and error diagnostic by color Touchpanel

Options at extra cost

perforating device with needle roller, additional rows of needle

integration of feeding systems (e. g. MGZ 400IL or transport conveyor) in PLC and product data memory

print registration control

wheel/knife – combination (patent pending – 10224360.3)

free rotating wear free counter seal bar for films without PP content (registered design)

wheel/knife – combination (patent pending – 10224360.3) with separate cold-knife

outfeed conveyor as "kissing conveyor" for small products (<3")

tear-open perforation by cutting wheel for easy opening of packages

integrated modem


Ethernet-Interface (hardware), e.g. for connection to production server

electromotorical format change-over (width and height) data according to product data memory

vacuum conveyor for precise film feed and tight packaging

Machine dimensions (approx):

(This drawing may show options which are not included in the basic machine version and are available against up-charge only).

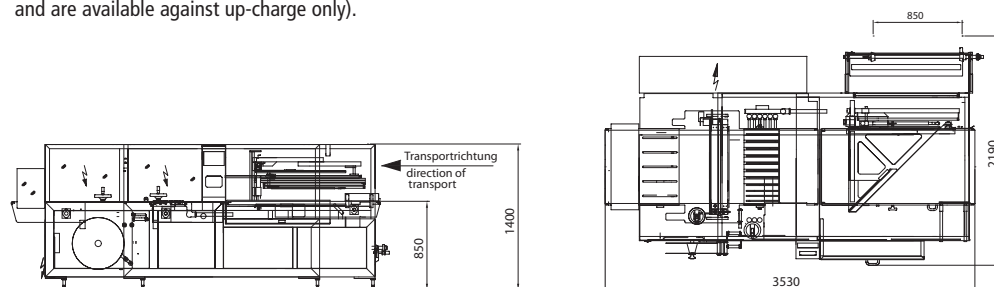

CPS&S Inc.
770-751-7400
E-Mail: info@kallfass-us.com
Website: www.kallfass-us.com

